

Product Highlights

***Engineered Performance,
Premium Quality, and Regulatory
Compliance***


Advanced Silicon/Graphite anode coupled with latest NCA cathode technology provides outstanding power delivery, even at -10°C

Extended cycle life with protection circuit and optimized cell selection

Power connector options - XT90, XT60, or custom requests

UN 38.3 Approved in a CONUS ISO 17025 accredited test facility, and manufactured in a domestic AS 9100 production facility

Manufactured in an AS 9100 American facility, the MPS Series of Lithium-ion batteries provides the highest levels of performance as well as protection from over-voltage, over-current, over-temperature, and short circuit conditions. Leveraging the Molicel INR-21700-P50B high power cell and our standard Battery Management System (BMS), this 6S1P battery delivers the highest current, extended cycle life, rugged packaging, premium quality, and UN 38.3 agency approvals.

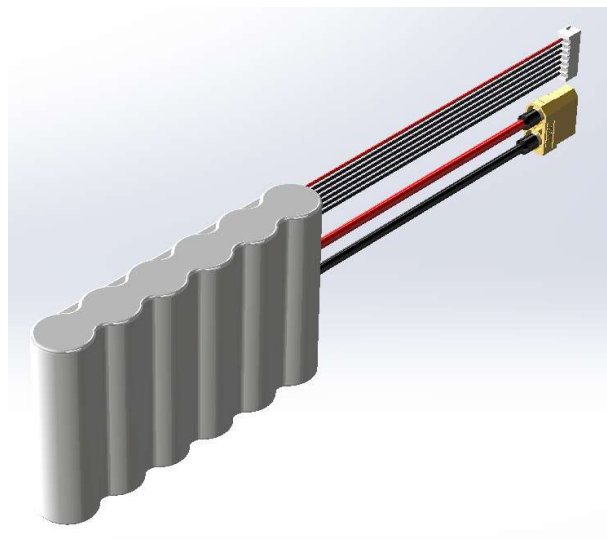

Electrical Specifications & Approvals

Nominal Voltage (V)	21.6
Minimum Voltage (V)	15
Nominal Capacity (Ah)	5
Continuous Discharge Current (A)	60
Pulse Discharge Current, 3 sec's (A)	90
Maximum Charge Voltage (V)	25.2
Maximum Charging Current (A)	10
Watt-Hours (Wh)	108
Shipping Classification	Class 9
Agency Approvals	UN 38.3

Mechanical Specifications

Weight (g)	446
Dimensions (length, mm)	128
Dimensions (width, mm)	23
Dimensions (height, mm)	70
Energy Density (Volumetric, Wh/l)	489
Energy Density (Gravimetric, Wh/kg)	242
Operating Temperature Range	-20°C to +60°C
Storage Temperature Range	-40°C to +60°C
Operating Humidity	20% to 80%
Power Connector	..., XT60, XT90
Charging Balance Connector	JST-XH 6S
Part Numbers	6S1P-M1-XT60, 6S1P-M1-XT90